

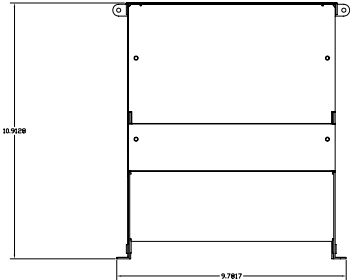


REVISION		
REV.	DESCRIPTION	CHG. BY & DATE

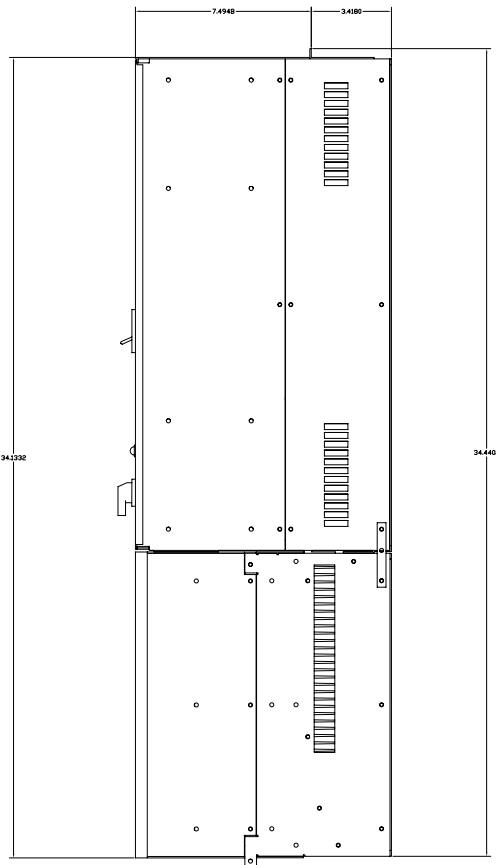

Approximate Weight: 85 Lbs. [39 Kgs]

Top and Bottom endplates are removable to gain access inside the drive and to punch holes for conduits. Endplates end plates must be removed from the drive before drilling and punching holes to avoid metal dust inside the drive enclosure. Failure to do so will cause damage to the drive.

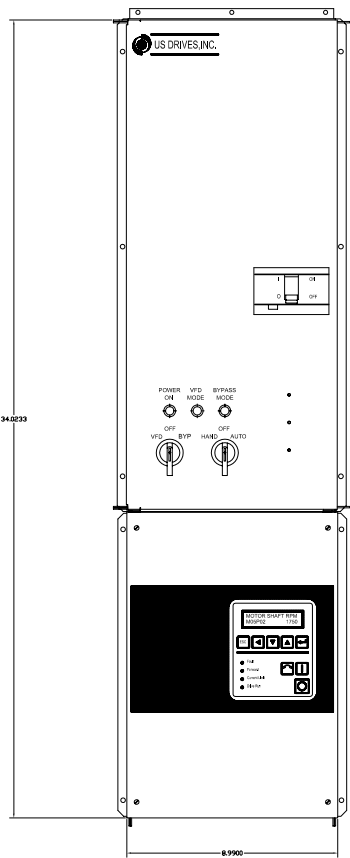

This is AutoCAD drawing # SIZE0-N12-BP

<p>US DRIVES, INC. CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL DISCLOSED HEREIN. THIS DOCUMENT MAY NOT BE DISCLOSED TO OTHERS NOR THE INFORMATION HEREIN BE USED WITHOUT WRITTEN PERMISSION FROM US DRIVES, INC.</p>	DIMENSIONS IN INCHES:		DR	APPD
	TOL. ±	FR	TITLE	
	±.XX		SIZE 0 NEMA TYPE 12 WITH BYPASS	
	ANGLES ±		240VAC & 480VAC ONLY (D2 & D4 MODELS)	
HOLE DIA.	±.003			SHT 1 OF 1